



Spreaders Direct

PRODUCT CATALOGUE

SPREADERS DIRECT

01228 710707


830 T3.0 BELT SPREADER

The Transpread 830 T3.0 is a small general purpose spreader ready for use on the farm, contract work or can be made into a more specialised machine at the time of build.

- 2.4m long mild steel hopper (stainless steel is an option) with a nominal capacity from 2,750 litres
 - 830mm wide cleated endless belt
 - 675mm diameter spinner discs
 - 50cc Danfoss spinner motors - 80cc for liming
 - Flow control valve on front panel to control spinner speed and protect spinner motors, this can be left fully open and the speed governed from the cab on a tractor with electronic spool valves
 - 12v cab mounted tachometer to monitor spinner speed
 - Twin or single rear hopper doors (single for liming to minimise obstructions to the lime)
 - Spinner deflectors available for fertiliser or liming operations
 - 3 speed gearbox driven by jockey from road wheel
 - Application rates governed by door opening and gear ratio chosen, full rates charts in operators manual
 - Standard tyres fitted are 550/45x22.5 on 8 stud rims (or taller 550/60x22.5 units, with many other options)
 - Standard axle is an 80x80 full beam with 350x60 hydraulic brakes
 - A range of colours are available in two pack marine grade paint
-

These machines are simple but the sturdy construction makes them ideal for farm use and maintenance, this particularly applies to the smaller models which share many working/wear parts with larger machines.



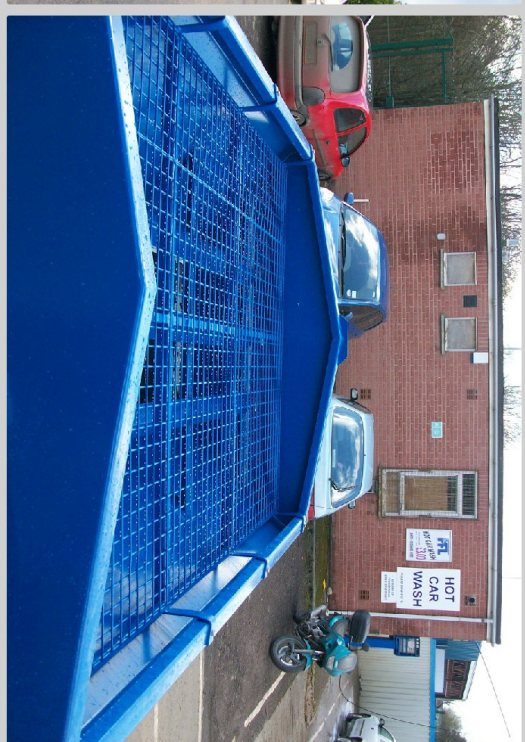

830 T3.5 BELT SPREADER

The Transpread 830 T3.5 is a handy sized general purpose spreader for farm or contract work. The 3.0m long hopper enables easy loading by telehandler

- 3.0m long mild steel hopper (stainless steel is an option) with a nominal capacity from 3,500 litres
 - 830mm wide cleated endless belt
 - 675mm diameter spinner discs
 - 50cc Danfoss spinner motors - 80cc for liming
 - Flow control valve on front panel to control spinner speed and protect spinner motors, this can be left fully open and the speed governed from the cab on a tractor with electronic spool valves
 - 12v cab mounted tachometer to monitor spinner speed
 - Twin or single rear hopper doors (single for liming to minimise obstructions to the lime)
 - Spinner deflectors available for fertiliser or liming operations
 - 3 speed gearbox driven by jockey from road wheel
 - Application rates governed by door opening and gear ratio chosen, full rates charts in operators manual
 - Standard tyres fitted are 600/55x22.5 on 8 stud rims
 - Standard axle is an 80x80 full beam with 350x60 hydraulic brakes
 - A range of colours are available in two pack marine grade paint
-

These machines are simple yet the sturdy construction makes them ideal for farm use and maintenance. These machines can be a basis of a more specialised machine dedicated to fertiliser or salting.





830 T4.0 BELT SPREADER

The Transpread 830 T4.0 is a medium sized machine that is suitable for the larger farm, estate or contractor use.

- 3.0m long mild steel hopper that is slightly deeper (stainless steel is an option) and a nominal capacity from 4,000 litres
 - 830mm wide cleated endless belt
 - 675mm diameter spinner discs
 - 50cc Danfoss spinner motors - 80cc for liming
 - Flow control valve on front panel to control spinner speed and protect spinner motors, this can be left fully open and the speed governed from the cab on a tractor with electronic spool valves
 - 12v cab mounted tachometer to monitor spinner speed
 - Twin or single rear hopper doors (single for liming to minimise obstructions to the lime)
 - Spinner deflectors available for fertiliser or liming operations
 - 3 speed gearbox driven by jockey from road wheel
 - Application rates governed by door opening and gear ratio chosen, full rates charts in operators manual
 - Standard tyres fitted are 600/55x22.5 on 8 stud rims
 - Standard axle is an 80x80 full beam with 350x60 hydraulic brakes
 - A range of colours are available in two pack marine grade paint
-

These machines are simple but the sturdy construction makes them ideal for farm use and maintenance. The slightly deeper hopper provides a greater nominal capacity of 4,000 litres.






830 T5.5 BELT SPREADER

The Transpread 830 T5.5 is a larger machine which is ideal for estate or contractor use, often this machine is supplied as a specialised liming spreader.

-
- 3.0m long mild steel hopper that is much wider and deeper (stainless steel is an option) and a nominal capacity from 5000 litres
 - 830mm wide cleated endless belt
 - 675mm diameter spinner discs
 - 50cc Danfoss spinner motors - 80cc for liming
 - Flow control valve on front panel to control spinner speed and protect spinner motors, this can be left fully open and the speed governed from the cab on a tractor with electronic spool valves
 - 12v cab mounted tachometer to monitor spinner speed
 - Twin or single rear hopper doors (single for liming to minimise obstructions to the lime)
 - Spinner deflectors available for fertiliser or liming operations
 - 3 speed gearbox driven by jockey from road wheel
 - Application rates governed by door opening and gear ratio chosen, full rates charts in operators manual
 - Standard tyres fitted are 600/55x22.5 on 8 stud rims with much larger options available
 - Standard axle is an 80x80 full beam with 350x60 hydraulic brakes
 - Options include full commercial axles with air or hydraulic braking
 - A range of colours are available in two pack marine grade paint
-

Often specified with a longer 3.6m hopper to give a greater nominal capacity of 5,000 litres without excessive width. A real workhorse for the professional user.



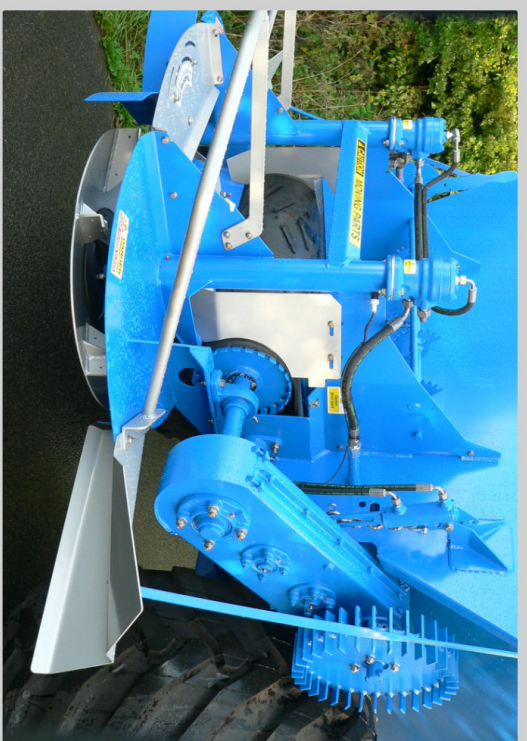


V730 T7.0 CHAIN SPREADER

The Transpread V730 Chain Spreader is a versatile, robust and corrosion resistant machine well suited for liming, fibrofos and bulk fertiliser use.

- A deeper 3.0m long stainless steel hopper with a nominal capacity from 6,000 litres
 - 730mm wide chain assembly to empty hopper running on low friction polyethylene floor
 - Hopper chain driven by rear shaft mounted 3 speed gearbox taking drive by jockey from road wheel
 - Application rates governed by hopper door opening and gear ratio governed by hopper door opening and gear ration chosen, full rates charts in operators manual
 - Twin 675mm diameter spinner discs driven by individual Danfoss hydraulic motors via enclosed shafts
 - Spinner speed controlled by front panel mounted flow control valve, this can be left fully open and speed controlled from the cab on tractors with electronic spool valve
 - Spinner speed monitored by cab mounted 12v tachometer
 - 10 stud axle with hydraulic brakes
 - 600/55x26.5 tyres with many other options available
-

A large spreader for farm or contractor use complete with a 730 wide chain mechanism, 3.0m long hopper with a deeper hopper and a nominal capacity of 6,500 litres.



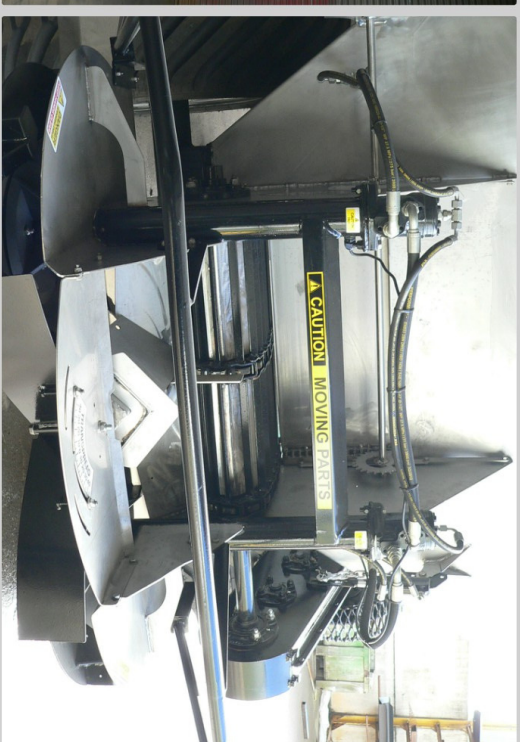

V500 T3.0 CHAIN SPREADER

The Transpread V500 T3.0 Chain Spreader is an economical, robust and corrosion resistant machine. It is well suited for lime, fibrofoss and bulk downgrade fertiliser.

- Stainless steel hopper at 2.4m long, this is usually supplied unpainted
 - 500mm wide chain assembly to empty hopper, running on low friction polyethylene floor
 - Hopper chain is driven by a rear shaft mounted 3 speed gearbox taking drive by jockey from the road wheel
 - Application rates governed by hopper rear door opening and gear ratio chosen, full rates charts in operators manual
 - Twin 575mm diameter spinner discs driven by individual Danfoss hydraulic motors
 - Spinner speed controlled by front panel mounted flow control valve, this can be left fully open and speed controlled from the cab on tractors with electronic spool valve
 - Spinner speed monitored by cab mounted 12v tachometer
 - 8 stud axle with 300x65mm hydraulic brakes however other options available
 - 550/45x22.5 or 550/60x22.5 tyres as standard however many other sizes are available
-

These are much easier to drive than the belt machines due to the lower friction moving parts which makes it easier on the gearbox, shafts and bearings.





V500 T4.0 CHAIN SPREADER

The Transpread V500 T4.0 Chain Spreader is an economical, robust and corrosion resistant machine. It is well suited for lime, fibrofoss and bulk downgrade fertiliser.

- Stainless steel hopper at 3m long, this is usually supplied unpainted
 - 500mm wide chain assembly to empty hopper, running on low friction polyethylene floor
 - Hopper chain is driven by a rear shaft mounted 3 speed gearbox taking drive by jockey from the road wheel
 - Application rates governed by hopper rear door opening and gear ratio chosen, full rates charts in operators manual
 - Twin 575mm diameter spinner discs driven by individual Danfoss hydraulic motors
 - Spinner speed monitored by cab mounted 12v tachometer 8 stud axle with 300x65mm hydraulic brakes however other options are available
 - 550/45x22.5 or 550/60x22.5 tyres as standard however many other sizes are available
 - Different build heights are available depending on the customers' requirements such as lower for stability or taller for better spread pattern.
-

With a 3m long hopper it enables easy loading by a telehandler, these are much easier to drive than the belt spreader due to the lower friction on the parts.





CUSTOM SPREADERS

Whether Farmer, Contractor or Corporation
Our spreaders capacities range from 2,000kg to 12,000kg and are all uniquely designed to meet your requirements.



Litter Spreader

A V730 based machine, built low for use in chicken sheds to spread chopped pampas grass litters. Tow-able by Landrover from site to site.



Sand Spreader

1 of a range of 830 based sand spreaders built for Wiedenmann (UK) Ltd. For golf course and other sports facilities sand spreading.



Gravel Spreader

An 830 T6.5 based machine. Reversed hopper discharging at front onto a conveyor for trench filling. Also features a powered axle.

Call Today For A Quote
01228 710707



Spreaders Direct

CUSTOM SPREADERS

Whether Farmer, Contractor or Corporation
Our spreaders capacities range from 2,000kg to 12,000kg and are all uniquely designed to meet your requirements.



Horticulture Spreader

A V500 based machine with very narrow build. Specially built for use in apple orchards.



Power Axle

Power axle - using a hub reduction axle and Eaton differential a wide range of ratios are available. For use in specialised applications in soft or hilly ground.



Sea Sand Spreader

Custom hopper 830 machine with flip over loading board. Used for agricultural spreading of sea sand.

Call Today For A Quote
01228 710707



Spreaders Direct

CUSTOM SPREADERS

Whether Farmer, Contractor or Corporation
Our spreaders capacities range from 2,000kg to 12,000kg and are all uniquely designed to meet your requirements.



830 T8.0 Liming Spreader

A T8.0 limer with power axle.



830 T8.0 Spreader in Fertiliser Trim

Fitted with weigh cells and sprung drawbar.
Running on 710/50x30.5 Michelin Cargo Xbib tyres.



Transpread V730 T8.0 Chain Spreader

Built for liming operations in Poland and Ukraine. Stainless steel hopper and single speed gearbox built for simplicity of operation and servicing.

Call Today For A Quote
01228 710707



Spreaders Direct

SPARES AND REPAIRS

As manufacturers of Transpread Spreaders we carry and can order in a full range of spares, accessories and replacement parts for your spreader.

We recommend that our customers have their own stock supply of spares so when there is an issue it can be resolved immediately.

To order your spares call us on 01228 710707 and pay using your card, we accept most types of credit card (we do not accept American Express) and the spares will be sent through 1st class post, TNT or pallet delivery.

We can also supply spares for machines built by other manufacturers such as the Anderton Group.

We provide spares for the following machines:

830 Wide Belt Spreader
730 Wide Chain Spreader
500 Wide Chain Spreader

We also undertake repair work at our manufacturing facility in Dalston, near Carlisle. We can provide packages of spare parts and advice for those who wish to undertake their own machine rebuilds.

If you would like to enquire about available spare parts please ring 01228 710707.

Call Today For A Quote
01228 710707



Spreaders Direct



TRANSPREAD 730



Spreaders Direct

PRODUCT CATALOGUE

SPREADERS DIRECT

STATION ROAD | DALSTON
CUMBRIA | CA5 7LT
01228 710707